

# StarLink Connect<sup>MAX</sup> 2



## New! Multi-Carrier 5G StarLink Connect

with Up/Downloading for Top Panel Brands &  
Gemini Remote App with SMS Text Alert Option†



### Advantages:

- **Easy to Standardize & Stock:** **AT&T, Verizon & T-Mobile™** in One Unit, Intelligently Selected for Max QoS/Signal Strength - With automatic failover for best continuous reliability
- **Universal full event 5G sole or dual path cell/IP cellular alarm reporting from any panel brand, virtually anywhere** (selectable by plan on [napccomnet.com](http://napccomnet.com))
- **Dependable, full data reporting to any Central Station nationwide via AT&T, Verizon &/or T-Mobile™ Networks**
- **Ideal for System Upgrades & Takeovers, and Easiest Solution for Migrating from Landlines** - Supports Top-Brand Panels' Native Up/Download Software & Native Bus Data for smart events
- **5-Star Gemini App support for Full Control of Security System Operations**, view Status & Usage with Keypad-GUI & SMS Emergency/Status Alert Options† for you & customers (Free on Apple Store® & Google Play, under Napco)
- **Max RMR for You & Max Savings & Reliability for Accounts**
- **Pro Incentive Instant Rebate Program for all installations old or new - (Nothing to mail in.)**

### Starlink Connect Features:

- **Full Programming Support for Major Panels & Brands\*\***, Full Up/Downloading, i.e., Honeywell, DSC, Napco & Hand Programming ADT
- **Full Keypad Smart App**
- **Smart Bus-Based SMS/Notifications Powered by Gemini App†**
- **"Z-Hub Option" adds Z-Wave Device Control\*\*** for Connected IoT & Smart Scenes



AT&T + **verizon** + T-Mobile

### Plus:

- **Installs in Minutes with Panel-Powered Technology™** - No power supply to add on or fuss with
- **Use with Your Choice of Favorite Panel Brand(s) & Any Central Station (using Contact ID or 4/2)** - NO special equipment. NO radio activation fee
- **Patented Dual Diversity Antennae design** - for maximum signal acquisition & null avoidance, eliminates multiphase effects, signal clash & drop-outs (that single antennas are often prone too)
- **Works virtually everywhere with 1 of 3 Intelligently Auto-Optimized Cell Carriers(AT&T, Verizon and T-Mobile™)** & Napco Patented Signal-Boost™ Technology, throughout the communication transmission & reception super-amplifies alarm signals & wave shapes, i.e., at both the communicator and Napco UL Network Operations Center (NOC)
- **Award-Winning Gemini Full-Featured Smartphone App with SMS Message Alert option(for App, see listings under Napco Gemini)†**
- **Full Up/Downloading of Top Panel Brands\*\***: Honeywell®, DSC®, Napco®, plus, hand-programming of select ADT Safewatch
- **Native Hand-Programming of above\*\*** via Virtual Keypad App, also including ADT®
- **Also "Z-Model" for full smart data bus support of top panel brands (above) for smart scenes and full connected IoT/Z-Wave device support (uses standard Z-Wave Devices\*\*)**
- **Proven StarLink Reliability, Labor Savings & Class-Leading Technology with OTA firmware upgrades**
- **Comes Complete** - Includes dual high-performance antennas, all components & hardware (no extra parts or modules needed)
- **WiFi Option** - Add optional plug-in module and eliminate CAT5 cable run for connectivity
- **Bonus: Full High-Speed Napco Panel Up/Downloading -** Remote super-speed uploading/downloading, requires cable, #SLE-DLCBL
- **Choice of Economical Subscriber Service Plans**, separately available at [www.napccomnet.com](http://www.napccomnet.com)†



SLE-MAX2L-C & -Z

## STARLINK CONNECT MAX2 DUAL SIM TECHNOLOGY SLE-MAX2L-C & -Z MODEL SPECIFICATIONS

**Housing:** Durable ABS plastic (white) includes three keyhole slots for mounting (easy alignment with triple gang boxes), comes complete with dual diversity antennas

**Dimensions:** 5-3/8" x 7-7/8" x 1-7/8" (HxWxD)

**Weight:** 13.5 oz

**Humidity:** Maximum 93% (non-condensing)

### Environmental Ratings:

- Operating Environment: 0 to 49°C (32 - 120°F)

**Multi Cell Carriers:** **Verizon**, **AT&T** and **T-Mobile™**, Intelligently Selected for Max QoS/Signal Strength with automatic failover for best continuous reliability

**APP:** Napco Gemini App (Downloadable Free App on Apple Store® & Google Play®) - Smart Remote Virtual Keypad & SMS/Text Notifications using any/all keypad-bus activities & events, selectable plan-dependent†

### Electrical Ratings for +12V - All models powered by the control panel

- Input Voltage: 11-15VDC (power-limited output from control panel)

### Input Current:

- Standard -C Models: standby current: 100mA (110mA with telco EOLR) non-transmitting; 245mA, max. transmitting
- Z-Hub Models: standby current: 110mA (120mA with telco EOLR) non-transmitting; 255mA, max. transmitting

### Electrical Ratings for the IN 1 Burg/Fire Input:

- Input Voltage: 9-15VDC
- Maximum Input Current: Up to 2mA from control panel supply circuit

### Electrical Ratings for IN 2 and IN 3:

- Maximum Loop Voltage: 15VDC max
- Maximum Loop Current: 1.2mA
- End of Line Resistor (EOLR) Value: 10K

### Electrical Ratings for 3 PGM Outputs:

- Open Collector Outputs: Maximum Voltage 3V when active; 15V maximum when not active
- Maximum PGM Sink Current: 50mA (up to 15VDC)

### Compliances:

- ETL Listed. Meets UL365, UL985, UL1076, UL1610 and UL1023

## OPTIONAL ACCESSORIES:

**GEMINI APP** (Downloadable from Apple Store or Google Play, listed under "Napco Gemini") provides smartphone users full keypad remote control & Smart bus-based SMS/Notifications (Plan required)†

**WI2886LF** Technical Instructions for StarLink Connect MAX2

**WI2887LF** Technical documentation for Remote Panel Operation with StarLink Connect MAX2

**SLE-WIFI-MODULE** Optional plug-in module for connection to the Internet† via a wireless(Wi-Fi) link, eliminating a wired Ethernet cable (for use with any StarLink Model)

**SLE-ANTEXT75** Optional extended antenna with 75' premium low-loss cable and full mounting hardware. Supports all top brand radios, provides dramatic signal improvement (indoor/outdoor).

**SLE-ANTEXT50** As above, with 50' cable

**SLE-ANTEXT30** As above, with 30' cable

**SLE-ANTEXT3** As above, with 3' cable

**SLE-DLCBL** For use with Gemini™ panels only, Napco up/download cable, sold separately



**SLE-DLEXT** Optional, for Napco Gemini up/downloading, extends distance from radio to panel, from 10' up to 100'



### StarLink Connect SLE-MAX2L-Z

Adds Smart IoT/Z-Wave Device Control, too

AT&T + Verizon + T-Mobile

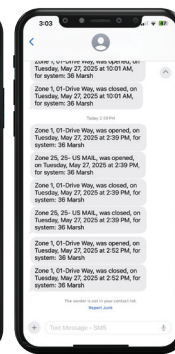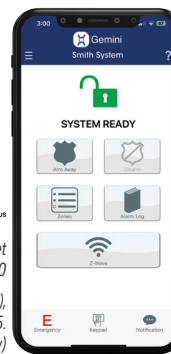

Communicator: ETL Tested to Meet UL985, UL1023 and UL2610

Napco Network Operations Center (NOC),  
UL Listed UL 1610, UL 1635,  
SOC 2 (for Cybersecurity)

## ORDERING INFO:

**SLE-MAX2L-C** StarLink Connect MAX2 Dual Sim Technology **AT&T**, **Verizon**, **T-Mobile™** Communicator, Cell or Cell/IP, with Gemini App support and SMS Alerts option, selectable by plan on NapcoComnet.com. Comes complete with ABS Housing, 2ea Dual Diversity Antennas, and all hardware, needed.

**SLE-MAX2L-Z** StarLink Connect MAX2 Dual Sim Technology Z-Model for Smart Device Support, **AT&T**, **Verizon**, **T-Mobile™** Communicator & Hub, as above but with IoT/Z-Wave Device support\*\*



NAPCO Security Technologies, Inc. 1-800-645-9445 • [www.StarlinkConnectMulti.com](http://www.StarlinkConnectMulti.com)

StarLinkMax, StarLink MAX2, StarLink MAX Multi, StarLink Connect, StarLink Fire, Signal Boost, Paneled Powered Technology & StarLink Omni™ are trademarks of NAPCO. Other marks herein remain intellectual property of their respective cos. \*Promotions subject to change w/o prior notice. \*\*For Specific Models Supported, and compliances consult tech docs, manuals/Wis. † Note: Some features and functions are plan-dependent; see choice of selectable plans on [www.napcoconnet.com](http://www.napcoconnet.com) during radio activation. ©5.25 A889