

Napco Access Series: NA-2 2-Door Access Controller

Dual-Door Control, Doubled Capability

NEW! NA-2 PANEL



MVP ACCESS/EZ CLOUD-READY



The NA-2 from the new Napco Access Series is a robust two-door access control panel designed for professional-grade installations that demand more capacity and flexibility. Like all models in the series, it supports both the enterprise-level MVP Access platform and the app-based MVP EZ, allowing intuitive setup and control via smartphone.

The NA-2 makes independent decisions for up to two doors and supports any Wiegand or OSDP readers. With 16MB of onboard flash memory, it stores up to 25,000 cardholders and includes two reader outputs, dual door contacts, two REX inputs, an auxiliary alarm input, and dual Form-C relays for locking control. The panel includes a fire alarm input for strike release during emergencies and maintains UL294 compliance for safety and performance.

Powered by a 12VDC supply, the NA-2 supports a 7AH backup battery for up to 4 hours of operation at full load—and includes a 3V lithium battery to preserve the real-time clock. With built-in Ethernet, the NA-2 ensures streamlined updates & cloud-based firmware upgrades for secure, connected access control.

Features:	
Card Access Compatibility	Full function on- or off-line
Card Holder Credential Capacity	25,000 Card Holders
Number of Doors Supported	2 doors
Reader Types	Supports Any Wiegand or OSDP Compatible Readers
Reader Capacity	2 Readers
Reader Power Output	12VDC, 200mA max per reader (Total 400mA)
Reader LED Outputs	2 active low LEDs, one per Reader (50mA limit)
Supervised Alarm Inputs	6 on Board: (2) Door Contacts (2) Request to Exit Devices plus (1) Accessory Alarm & (1) Dedicated Fire Alarm Input.
Output Relay	2 on board. Form C, Selectable for Wet/Dry. Dry Relay, 2 Amps per Relay @ 12/24V up to 28V AC/DC; Wet Relay 1.6 Amps Total for both relays including the 12V Accessory Output @ 12VDC.
Console Relay	1 on board. Form C, Dry Relay Only, 2 Amps @ 12/24V up to 28V AC/DC
12V Out	12VDC Output, 1.6A total combined, shared with the two Wet Relay Outputs (Power Limited Output). Battery Backed.
Relay Circuit Protection	All relays - Circuit protected
Memory	16MB on board
FRAM	1,250 Standard transaction buffer. FRAM 1Mb Dedicated
Access Modes	Credential Only, Unique PIN only, Credential & PIN, Common Code, Free Access
Ethernet Port	One 10/100 Base-T(Built-in)
Communication Modes	Ethernet-10/100 Base-T
Data Encryption	AES128 Encryption
Downloadable Firmware	Via Cloud Based Download
Diagnostic LEDs	Main Interface Board. DC Power Indicator- (1 LED) -Viewable through cabinet door
Clock Battery Backup	Greater than 5 years at 25°C (field-replaceable by qualified service personnel only).
Battery Backup	12V 7AH Battery (UL Listed Sealed Lead Acid 7AH Battery Sold Separately) Standby Power with max reader load: 4 HRS Standby Power with max reader load & 800mA EM Locks: 2 HRS (Not Included)
Enclosure Dimensions (Height x Width x Depth)	Cabinet: Height: 11" (279.4 mm) Width: 12" (304.8 mm) Depth: 3" (76.2 mm)
Weight	5 lbs (2.267Kg) not including battery




Ordering Information

NA-2 2-Door Controller, 12VDC,
Surface Mounted, MVP-Platform-Ready
(Also available, NA-1 Single Door Controller.)

Choice of Cloud Management Options:



MVP-EZ
App-Only 

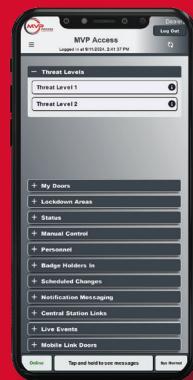

MVP-ACCESS
Enterprise 

or

Capabilities

- 2 Door Controller.
- 25,000 cards standard
- 2 Wiegand Reader Inputs, Five-wire
- 2 OSDP V1/RS485 Reader Connections
- 2 Door Position Inputs
- 2 Request to Exit Inputs
- Built-In Ethernet Port 10/100Base-T Ethernet Interface
- AES 128-bit encryption
- Reader Power: Each Reader is rated for 12VDC @ 200mA Total 12VDC @ 400mA combined
- 1 Alarm/Supervised Input
- 2 Relays on board. Form C jumper selectable Dry/Wet. Dry relay max load 12/24V up to 28V AC/DC, 2 Amp (Power Limited Circuit). Wet Relay rated at 12VDC, Total 1.6A for both relays (Power Limited Output)
- 1 Console Relay
- Built-In Relay Contact Overvoltage Protection
- 12VDC Aux Power, total power up to 1.6A. combined with wet relays
- 1 Dedicated Fire Alarm Input
- 48 Additional inputs/outputs (Supervised) using IO Board
- 1,250 Standard transaction buffer. FRAM 1Mb Dedicated
- 16MB On Board Memory
- 256 Time schedules
- 1,000 Access groups
- 100 holidays
- Battery Backup up to 4 Hours with max reader load. (UL Listed Sealed Lead Acid 7Ah Battery recommended)
- Enclosure Size 11"H x 12"W x 3"D
- ETL Listed UL294; FCC Listed

Ask for the NA-Series Access Controllers by Napco Access at your local distributor today